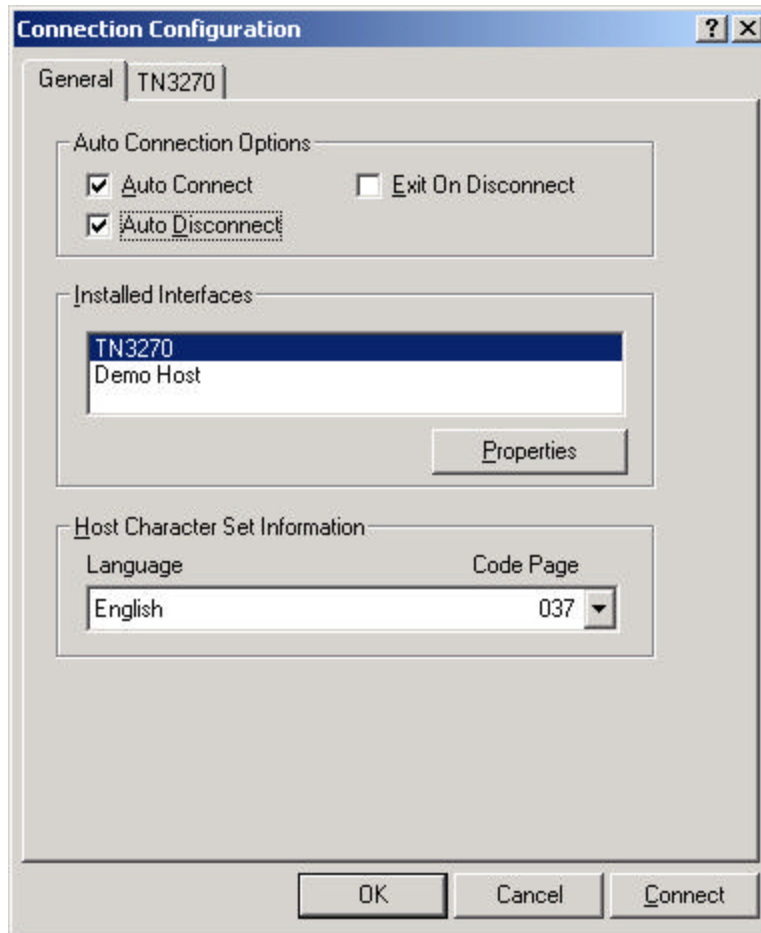We've all been here.

Select connection from the tool bar and then to configure the TN3270.
Ensure check marks are in Auto Connect and Auto Disconnect.

Connection Configuration

General | TN3270

Auto Connection Options
☑ Auto Connect   ☐ Exit On Disconnect
☑ Auto Disconnect
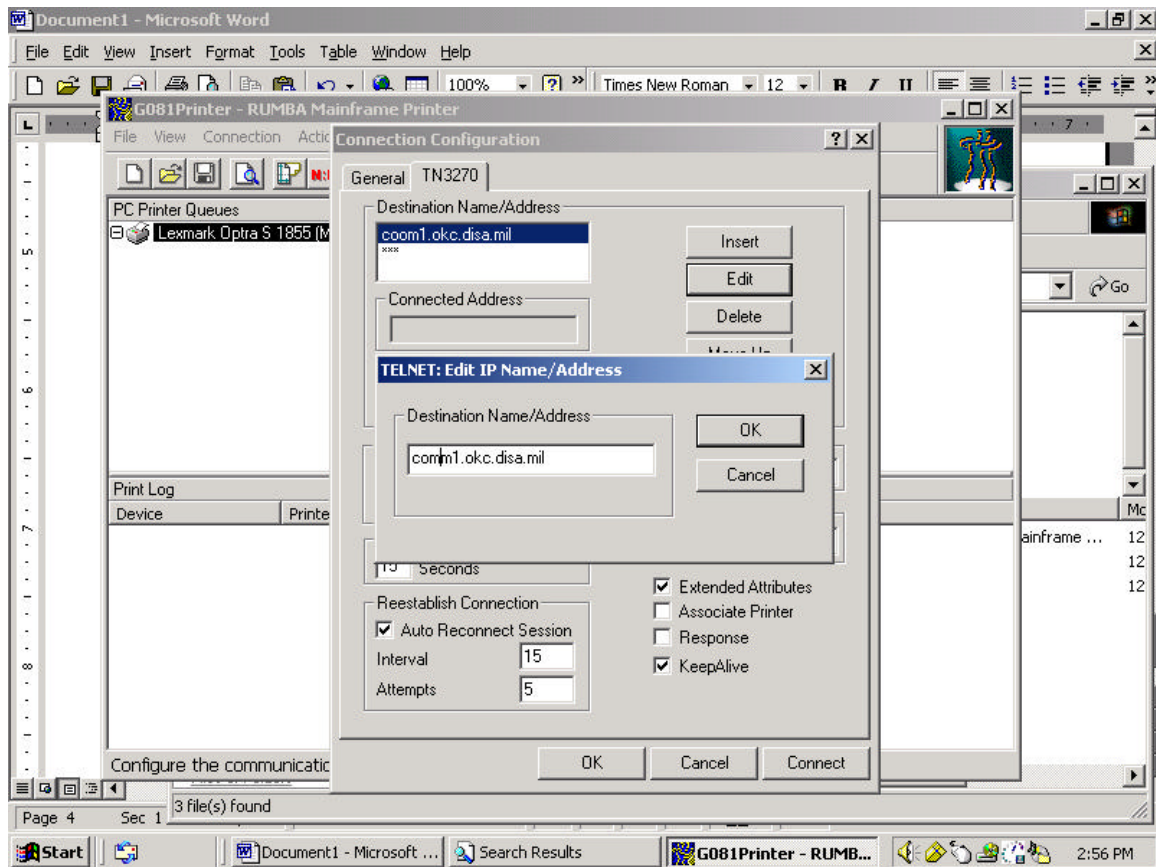
Installed Interfaces

TN3270
Demo Host

Properties

Host Character Set Information

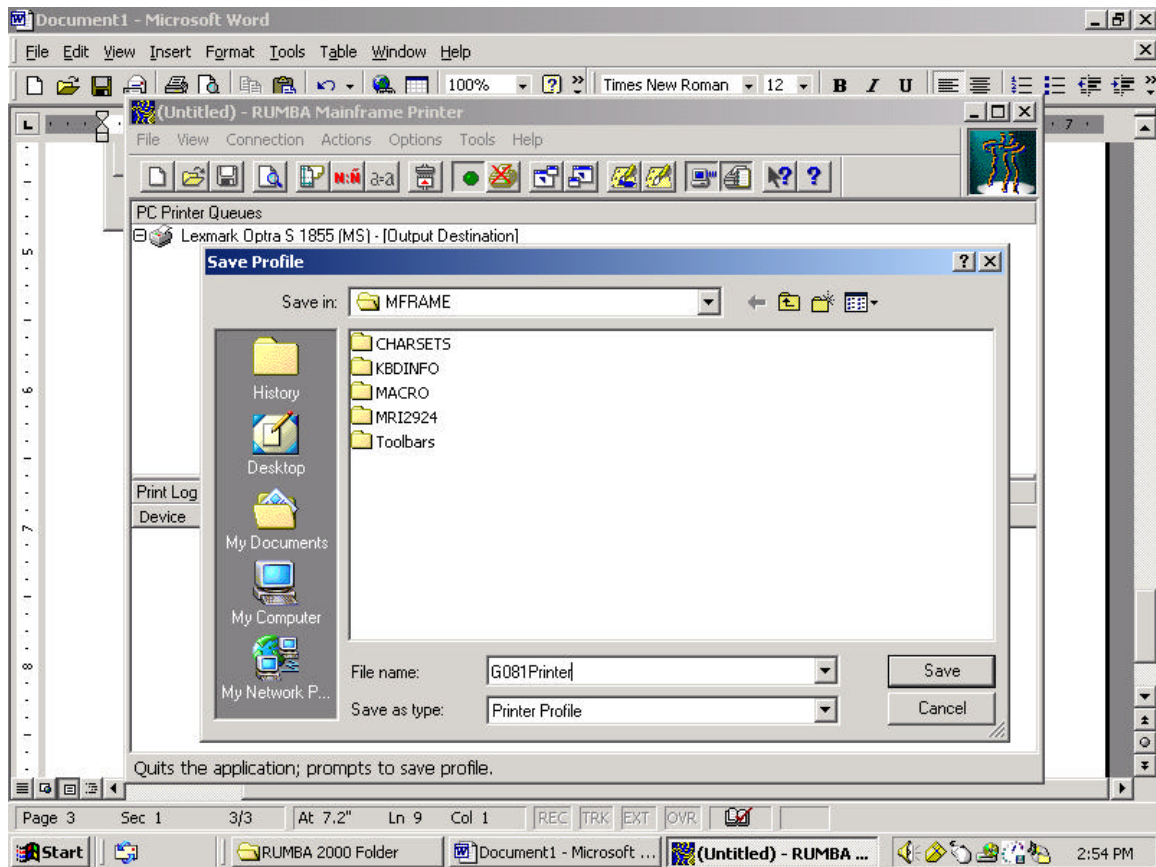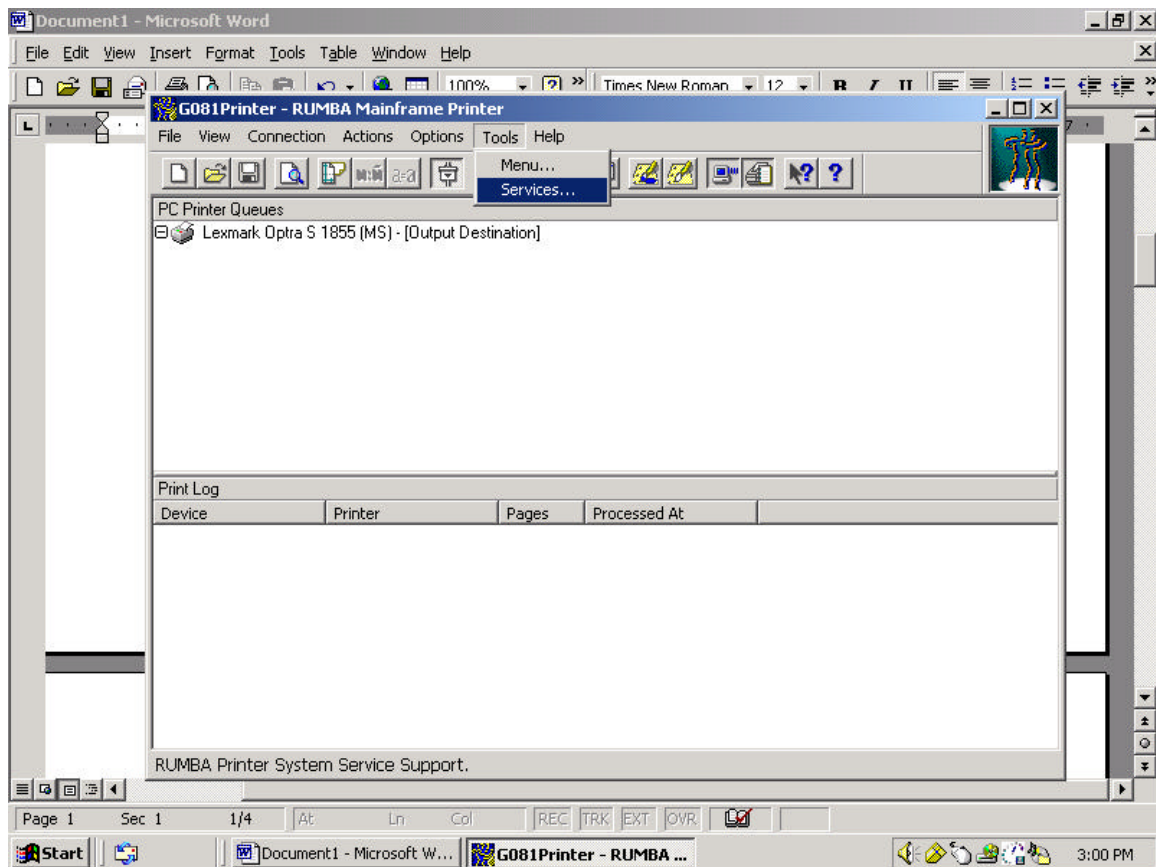| Language	Code Page
English	037 ▼

OK   Cancel   Connect
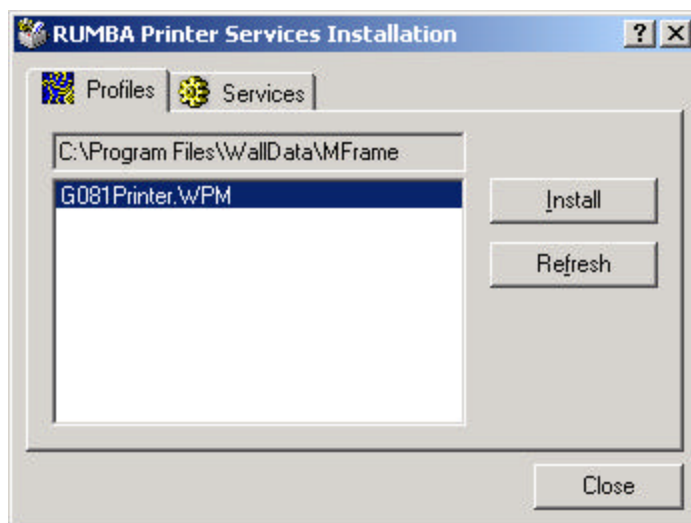
Configure the following as usual.

Save printer profile to a unique profile name. Save profile and close, returning to the "RUMBA Mainframe Printer" window.
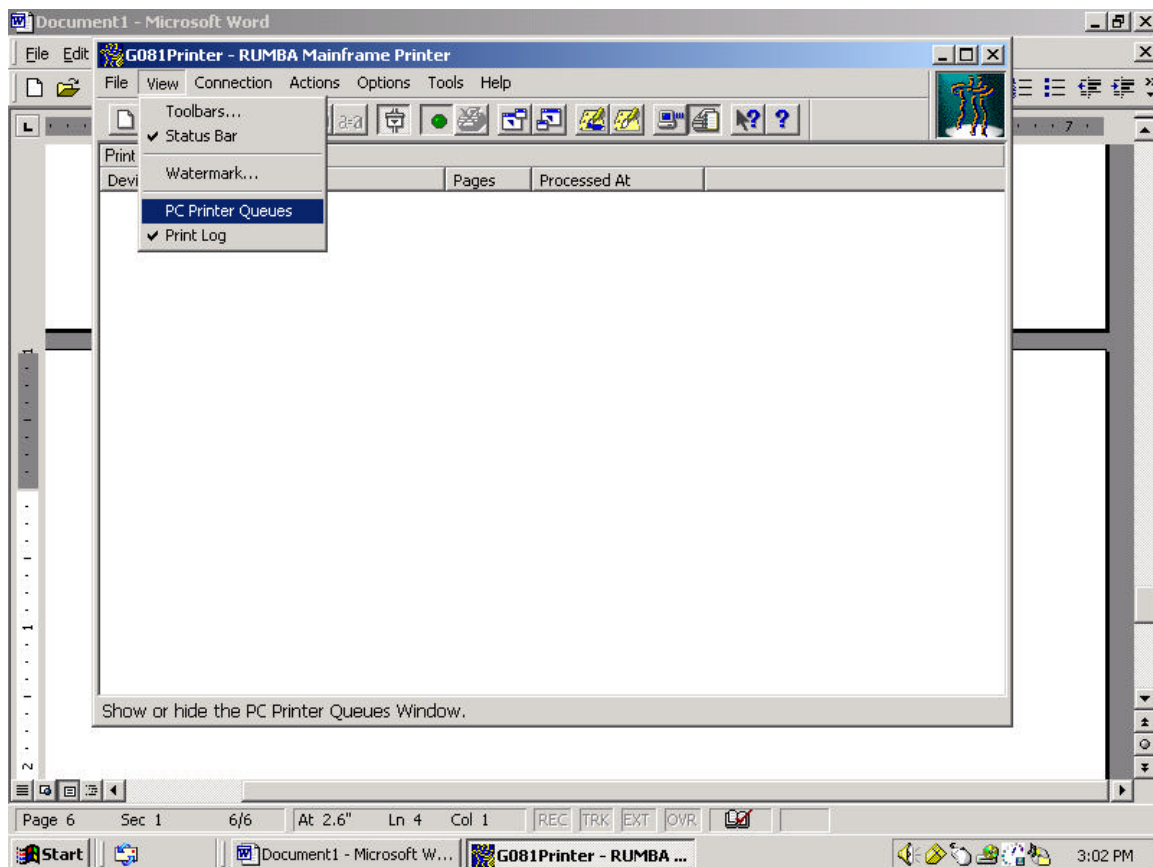
Select tools, then services

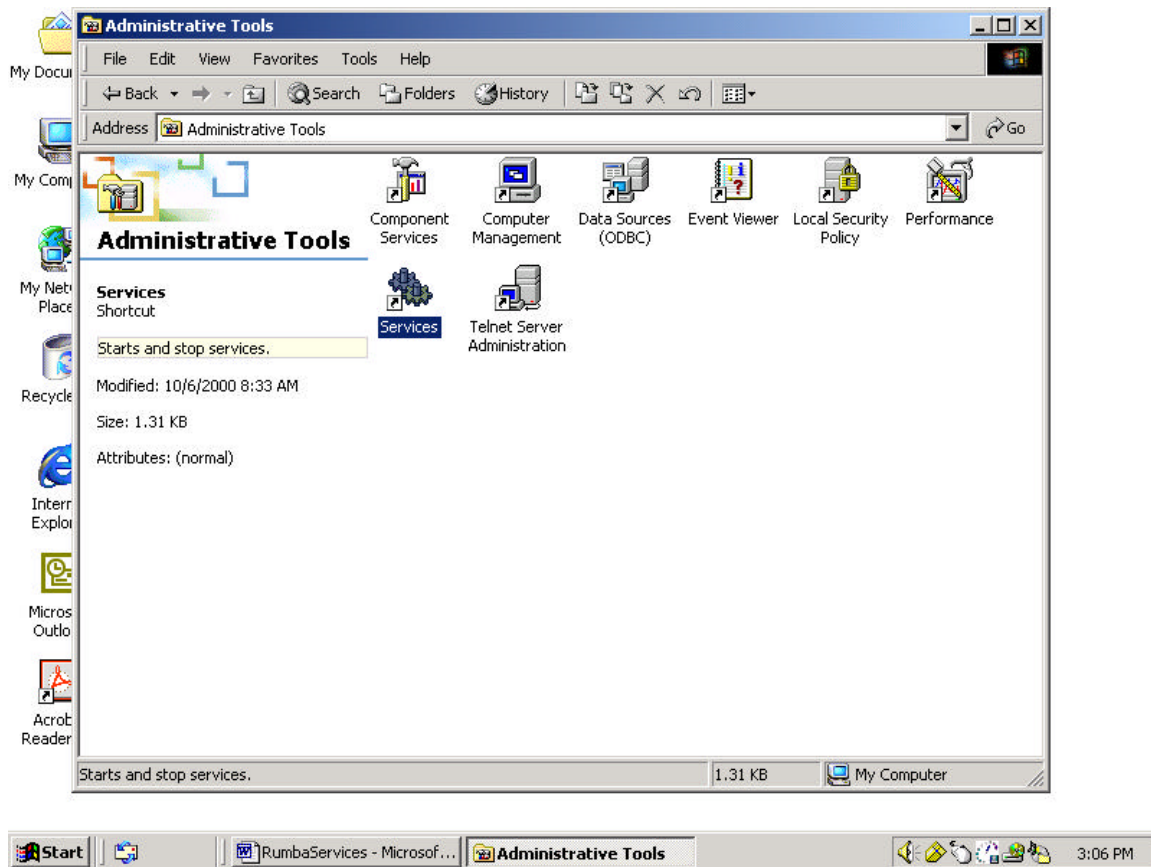Install your printer profile that you named earlier.

This is good!

Remove the check mark from "PC Printer Queues. Because RUMBA instructions says so!
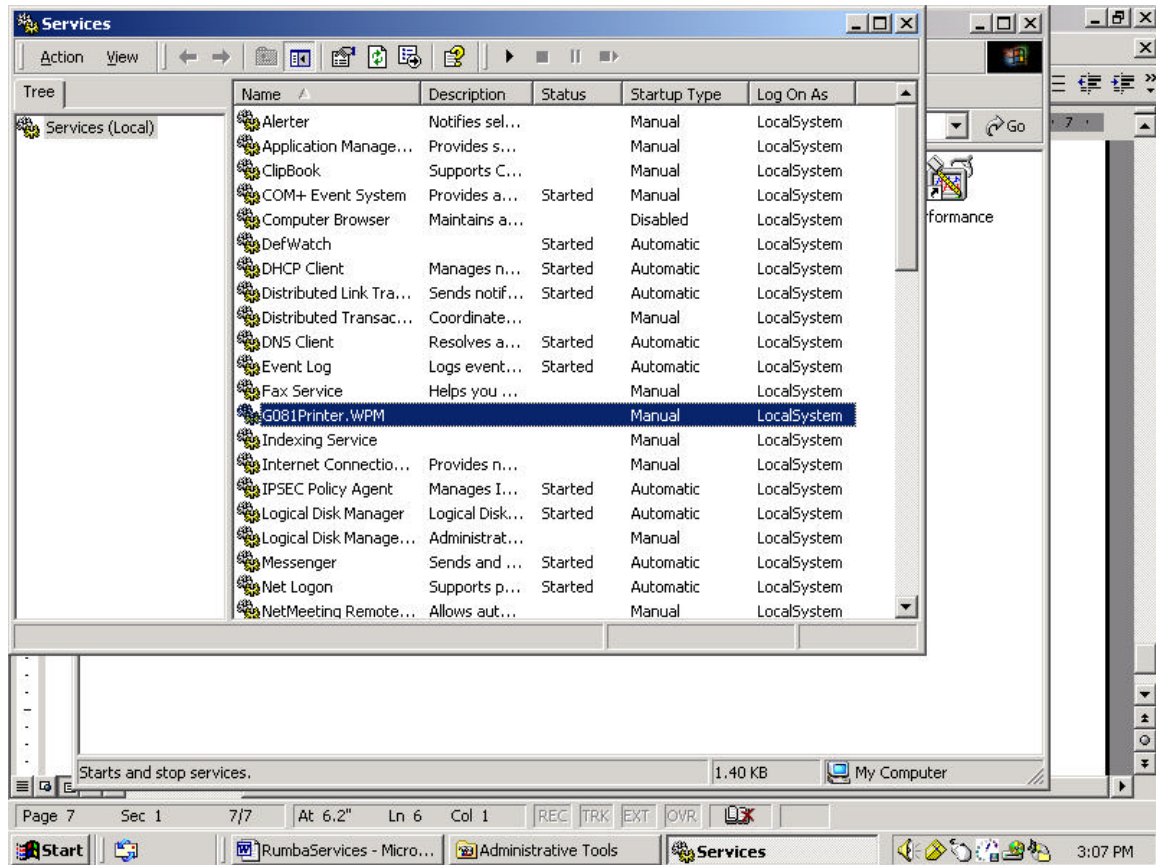

Quit and Save.. But your not done yet… At this point you may need to open the rumba printer session to adjust your fonts, page size and double check your printer destination..

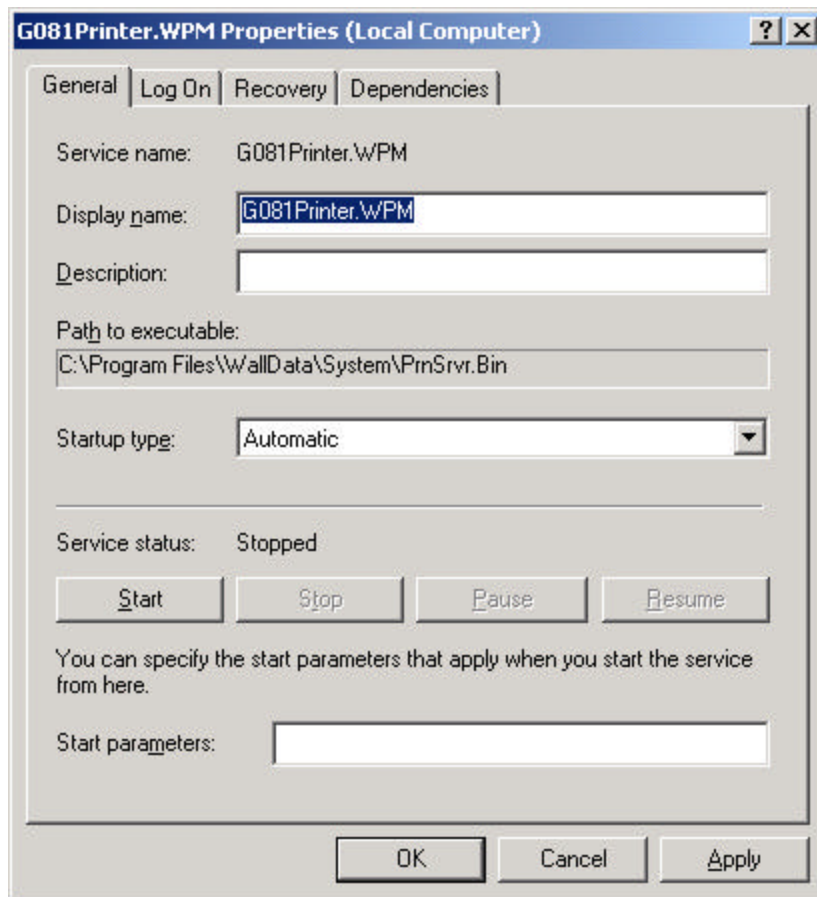Go to Control panel select Administrative Tools then select Services..
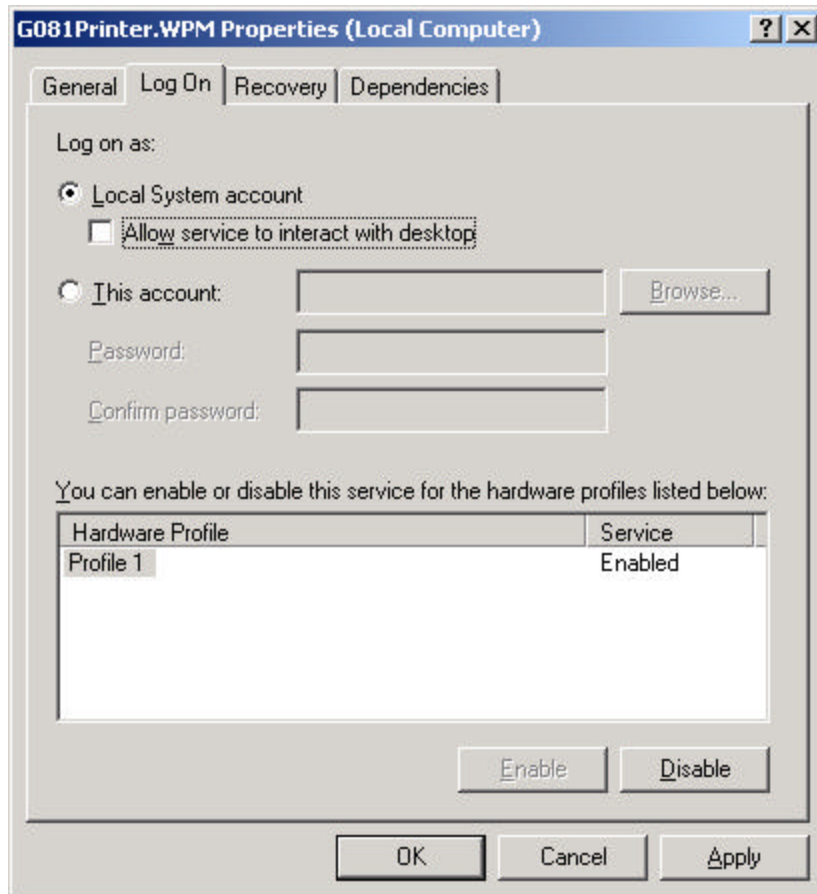
Find and Select your rumba printer..

Right click, Select properties, change "Startup type" to Automatic..

Click the "Log On" tab
Remove Check mark out of "Allow service to interact with desktop".

Close and accept settings. Reboot computer and without logging, go to a different computer and change your L-Term printer destination to the rumba printer and send it a G0-81 print product..

Good Luck.. ….d.w…